REVISIONS				
ECO	REV	DESCRIPTION	APPR	DATE
2813	C	ENTRANCE AND EXIT PUPIL DIMS ADDED	PTH	10/05/04
3435	D	change the recommended torque to 14 in*lb ffrom 15 in*lbf	JZ	06/06/06
4060	E	2.037 WAS 2.036; 1.50 WAS 1.500; 1.88 WAS 1.775; .16 WAS .156; .228 WAS .222; 3.0 WAS 2.96; .450 WAS .451; 2.6 WAS 2.64; .338 WAS .329; .319 WAS .325; .374 WAS .392; 1.346 WAS 1.348; .16 WAS .187; .06 WAS .060; MATERIAL WAS 6061-T6 ALUMINUM, FINISH WAS BLACK ANODIZE	JZ	12/12/07

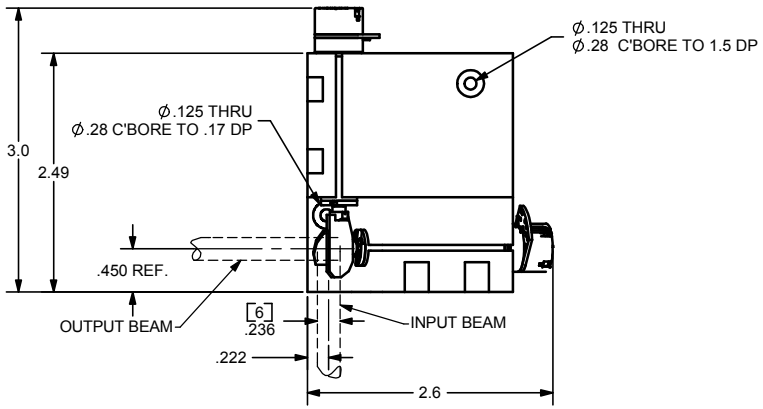

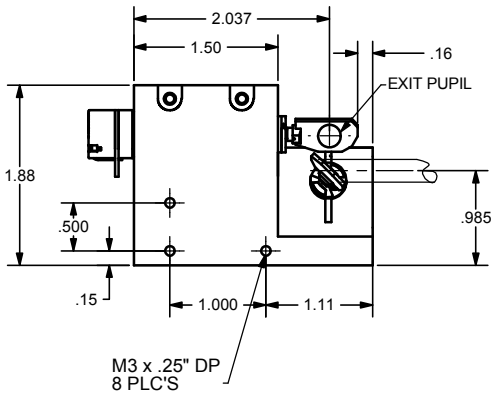

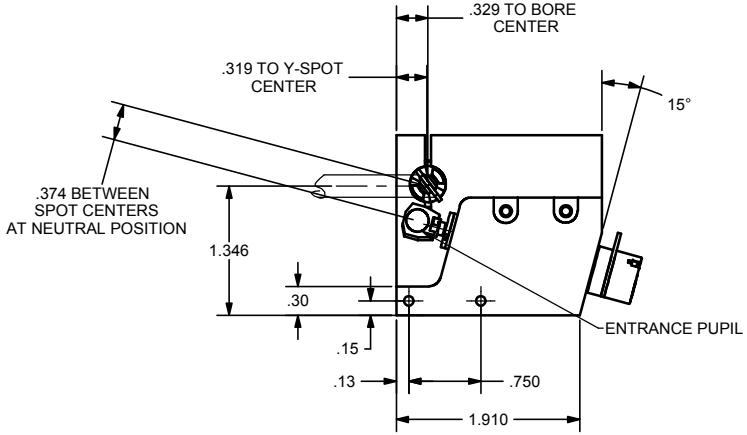

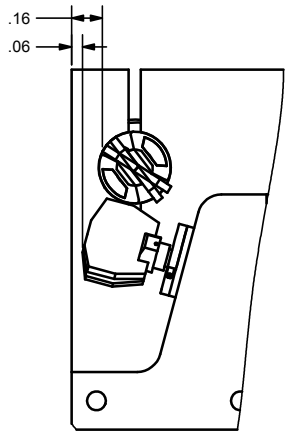

AUXILIARY VIEW
SCALE 2:1
DIMENSIONS ON THIS VIEW REPRESENT THE SMALLEST DISTANCES DURING MIRROR'S FULL ANGULAR RANGE

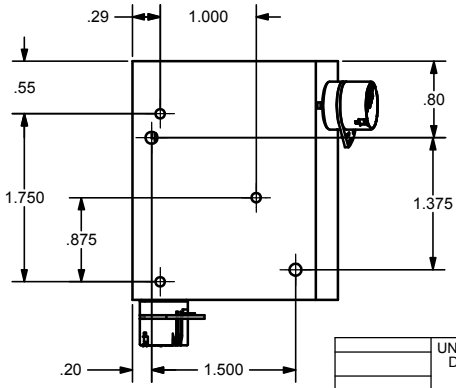

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY
2. CLAMP SCREW SIZE = #4-40x 3/8"
3. HEX KEY SIZE= 3/32"
4. RECOMMENDED SCREW TORQUE = 14 in*lbf (1.58 N*m)
5. CLAMP SCREW TORQUE TOLERANCE = ± 10%.

These drawings and specifications are the property of CAMBRIDGE TECHNOLOGY and shall not be reproduced, or copied, or used as the basis for the manufacture, or sale of apparatus without the written permission of CAMBRIDGE TECHNOLOGY, INC.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES
.XX± .010 ANGLES± 0°-30'
.XXX± .005
.XXXX± .0005
[ ] INDICATES mm
63
SURFACE ROUGHNESS √
BREAK ALL SHARP EDGES

MATERIAL -

FINISH -

61021506R40

USED ON

DRN

ENG JE 04/23/04

APPR

PROJECTION

DRAWING SIZE: C

CAMBRIDGE TECHNOLOGY, INC.
25 HARTWELL AVE
LEXINGTON, MA 02421

TITLE
6215
XY MNT INTERFACE , RH
Ø6mm, 40° OPT

DRW. NO. **D05960** REVISION **E**

SCALE 1:1 SHEET 1 OF 1

MODEL NAME: refl_beam

12/18/2007